


## AIR-OPERATED GREASE GUNS

### DRP 30



#### Inclusive extension tube and hose with hydraulic coupler

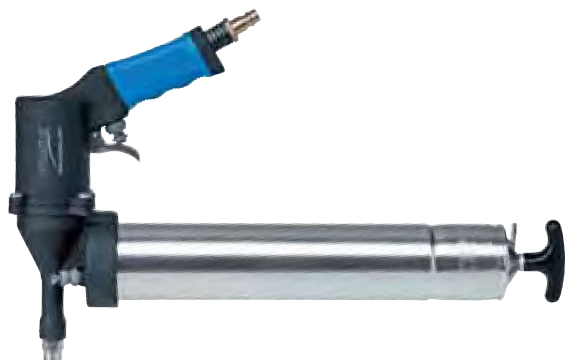

### Air-operated grease gun

- for 400 g (14.0 oz.) grease cartridges or 500 ccm (16.0 oz.) bulk grease
- continuous grease flow
- extra light and handy due to aluminium body with ergonomic handle
- compressed air connection for quick coupling
- comes with nozzle tube and HP hose according to DIN 1283
- comes with air release valve and separate filler valve (DIN standard)



barrel version	made of zinc-plated steel DIN 1283 special colours available Ø 56 mm (2.2")
barrel length	296 mm (11.6")
suitable for	grease up to NLGI 3
filling capacity	400 g (14.0 oz.) grease cartridge / 500 ccm (16.0 oz.) bulk grease
standard valve	air release valve and separate filler valve (DIN standard)
connection thread	G 1/8
pressure ratio	40:1
air pressure	3 – 7 bar, 43.5 – 100 PSI; recommended air pressure 6 bar/90 PSI

operating pressure	280 bar / 4,060 PSI max.
output	approx. 500 ccm/3 min. or 160 ccm (5.1 oz.)/min.
testing pressure	320 bar (4,640 PSI)
gun dimension	405 x 260 x 60 mm (15.9 x 10.2 x 2.36")
packed in	printed UMETA multi colour cardboard box
weight	1,385 g (48.8 oz.) + packaging
dimensions (L x W x H)	425 x 185 x 80 mm (16.7 x 7.3 x 3.15")

Connection	Packed in	Scope of delivery	Ref. No.:
G 1/8	cardboard box	complete with accessories: - HP hose Ø 13 (1/2") mm, 300 mm (12") length - nozzle tube 110/G each with hydraulic coupler	7437505