


OIL GUNS

UMETA oil guns are specially designed for operation with oils and high-viscosity grease, and they are manufactured with the same high quality as the well-established UMETA grease guns. Sealing elements and accessory parts specially designed for this purpose allow for optimal leakproof oil fittings.

70/PKO

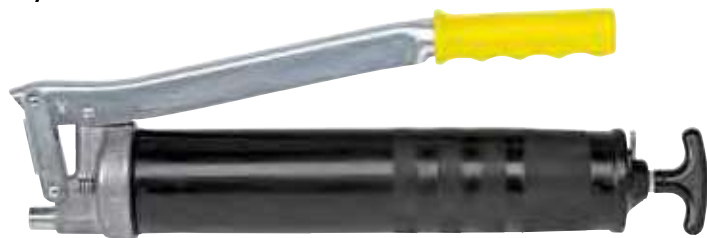

barrel version	shock-resistant polyamide barrel Ø 60 mm (2 1/8")
barrel length	292 mm (11 1/2")
suitable for	oils and high-viscosity grease
filling capacity	500 ccm (16.0 oz.) bulk grease and oil
connection thread	M 10 x 1 or G 1/8 upon request 1/8 NPT
operating pressure	400 bar / 5,800 PSI

Hand Lever Oil Guns with shock-resistant polyamide barrel

- for 500 ccm (16.0 oz.) oil

output	approx. 1.9 ccm (0.06 oz.)/stroke
testing pressure	800 bar / 11,600 PSI
packed in	printed UMETA polybag or printed UMETA cardboard box
weight	1,075 g (37.9 oz.) + accessories and packaging

Connection	Packed in	Scope of delivery	Ref. No.:
M 10 x 1	polybag	without accessories	V001549
M 10 x 1	polybag	with 340/GLN, incl. oil hydraulic coupling	V001502
M 10 x 1	polybag	with 110/GO	V001550
M 10 x 1	cardboard box	without accessories	V001554
M 10 x 1	cardboard box	with 340/GLN, incl. oil hydraulic coupling	V001555
M 10 x 1	cardboard box	with 110/GO	V001557

Connection	Packed in	Scope of delivery	Ref. No.:
R 1/8	polybag	without accessories	V001551
R 1/8	polybag	with 340/GLN, incl. oil hydraulic coupling	V001553
R 1/8	polybag	with 110/GO	V001552
R 1/8	cardboard box	without accessories	V001558
R 1/8	cardboard box	with 340/GLN, incl. oil hydraulic coupling	V001559
R 1/8	cardboard box	with 110/GO	V001560

43/S and 43/H



43/S



43/H

barrel version	shock-resistant polyamide barrel
tube measurements (Ø x L)	41 x 110 mm (1 5/8" x 4 1/8")
total length	270 mm (10 5/8")
suitable for	oils and high-viscosity grease
filling capacity	110 ccm (3.5 oz.)
connection thread	M 9 x 1

Telescopic Push Type Oil Guns

- form A according to DIN 1282
- suitable for oils and high-viscosity grease
- comes with pointed nozzle or hydraulic nozzle

The UMETA telescopic push-type oil guns are equipped with a telescopic tube and are therefore suitable for a precise lubrication. Light pressure suffices to allow for the effective lubrication of hydraulic nipples, ball-type and flush-type nipples.

operating pressure	180 bar (2,610 PSI)
output	0.6 ccm (0.02 oz.)/stroke
packaging	bulk
weight	120 g (4.2 oz.) + accessories and packaging

Type	Scope of delivery	Ref. No.:
43/S	pointed nozzle 500/S	7143133

Type	Scope of delivery	Ref. No.:
43/H	hydraulic nozzle 500/H	7143233